



# ThermaWall SM 2600

Thermally Broken Split Mullion, Pre-Glazeable Curtain Wall



Catalogue Pages



Specifications



CAD Details

[www.alumicor.com](http://www.alumicor.com)



# ThermaWall SM 2600



Thermally Broken Split Mullion, Pre-Glazeable Curtain Wall

## Features & Benefits

- High performance, prefabricated / pre-glazed split mullion curtain wall with a 2 ½" (63.5 mm) profile
- Mullion depth of 5 ¼" (133.5 mm) or 6 5/8" (168 mm) in both double and triple glazed
- Ideal for low to medium rise curtain wall
- Split mullion and expansion/stack horizontal makes prefabricated or pre-glazed panel installation a "snap"
- Pre-glaze capability affords shop fabricated quality control
- Polyamide structural thermal break provides complete thermal separation of caps and pressure plate screws from interior components
- Two, three or four sided Structural Silicone Glazed (SSG) capability offers freedom in design
- Anchor options from complex to simple will suit any project budget
- Fully tested to current performance standards

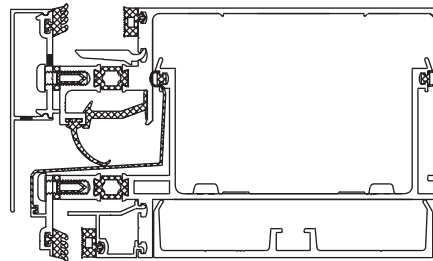

Double glazed capped system



The Tett Centre  
Kingston, ON



Google Kitchener-Waterloo Canadian  
Development Headquarters- Kitchener, ON