

# ThermaWall 2600

## Thermal simulation chart - Double glazed

THE FOLLOWING THERMAL CHARTS ARE TO BE USED TO DETERMINE OVERALL U VALUE OF THE PRODUCT BY KNOWING U VALUE CENTER OF GLASS AND SELECTED SPACER OR DETERMINE CENTER OF GLASS U VALUE AND SPACER BY KNOWING THE PRODUCT REQUIREMENTS FOR U VALUE.

- Curves represent independently tested simulation results based on double glazing options using the lowest (curve a) and highest (curve b) performing spacers. Spacer conductance values are based on nfrc 100-2010 section 5.9.5.1.
- Simulation methodology followed nfrc 100-2010
- Simulated curtain wall is  $78 \frac{3}{4}$ "(2000mm) x  $78 \frac{3}{4}$ "(2000mm) between mullion centers with one vertical central mullion as per nfrc100-2010 table 4.3.
- The charts should be used as a budget or design guide for fenestration product u-factor and rating purposes.


A = Double glazed with Generic Group1

-Spacer containing aluminum

B = Double glazed with Generic Group4

-Spacer containing all non metallic materials

CHART BASED ON 1" (25.4 mm)  
DOUBLE GLAZED SEALED UNIT

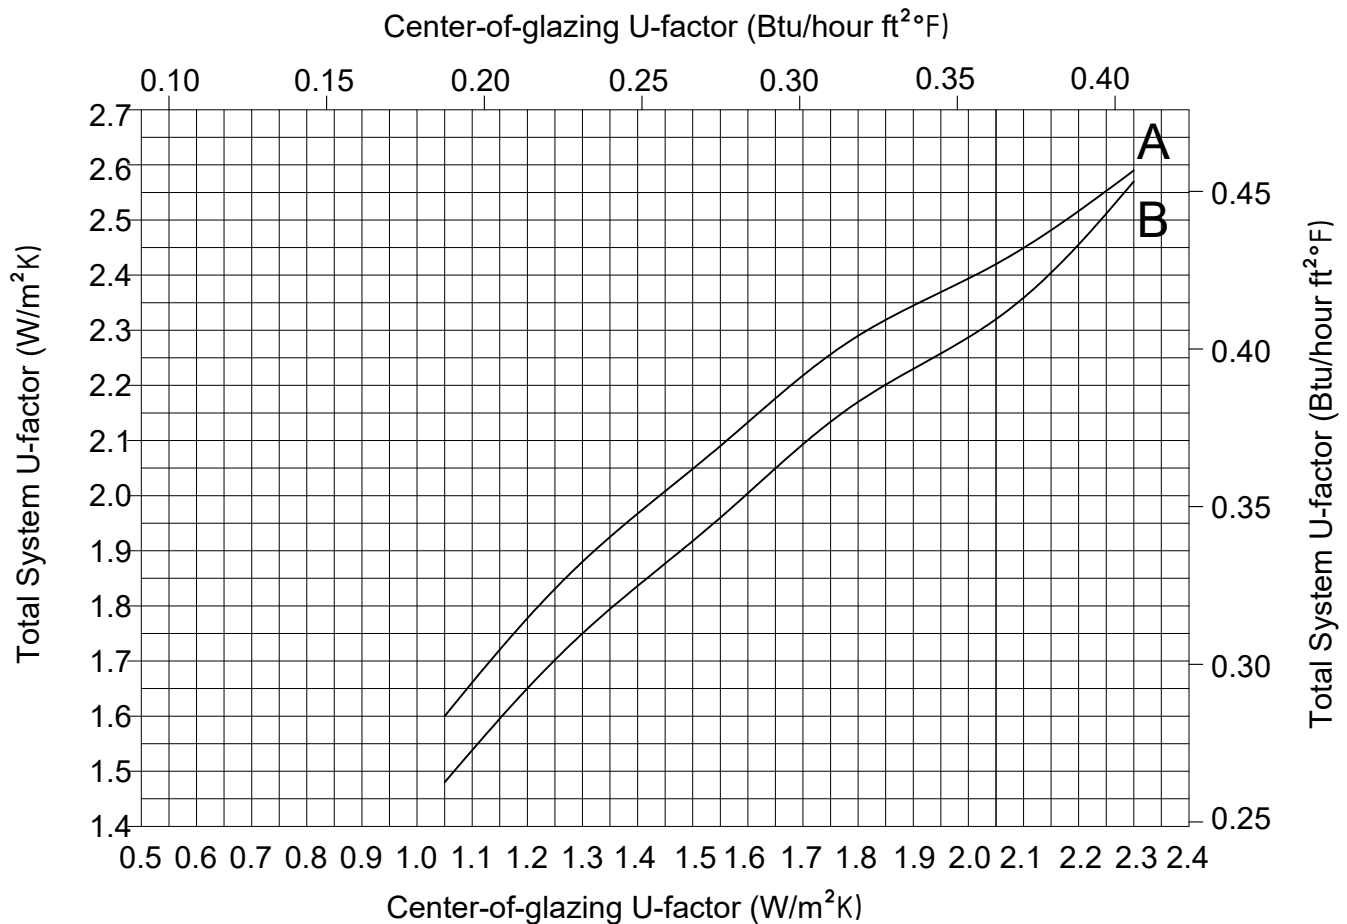

ENVIRONMENTAL CONDITIONS: NFRC 100-2001		
Inside Air Temperature	Outside Air Temperature	Outside Wind Speed
21° C	-18° C	5.5 m/s

**POUR LA VERSION EN FRANÇAIS, VEUILLEZ VOIR LA PAGE : 1.3.2.5**

# ThermaWall 2600


## Thermal simulation chart - Triple glazed

THE FOLLOWING THERMAL CHARTS ARE TO BE USED TO DETERMINE OVERALL U VALUE OF THE PRODUCT BY KNOWING U VALUE CENTER OF GLASS AND SELECTED SPACER OR DETERMINE CENTER OF GLASS U VALUE AND SPACER BY KNOWING THE PRODUCT REQUIREMENTS FOR U VALUE.

- Curves represent independently tested simulation results based on triple glazing options using the lowest (curve a) and highest (curve b) performing spacers. Spacer conductance values are based on nrc 100-2010 section 5.9.5.1.
- Simulation methodology followed nrc 100-2010
- Simulated curtain wall is 78 <sup>3</sup>/<sub>4</sub>"(2000mm) x 78 <sup>3</sup>/<sub>4</sub>"(2000mm) between mullion centers with one vertical central mullion as per nrc100-2010 table 4.3.
- The charts should be used as a budget or design guide for fenestration product u-factor and rating purposes.

A = Triple glazed with Generic Group 1  
 -Spacer containing aluminum  
 B = Triple glazed with Generic Group 4  
 -Spacer containing all non metallic materials

CHART BASED ON 1 <sup>3</sup>/<sub>4</sub>" (44.5 mm)  
 TRIPLE GLAZED SEALED UNIT

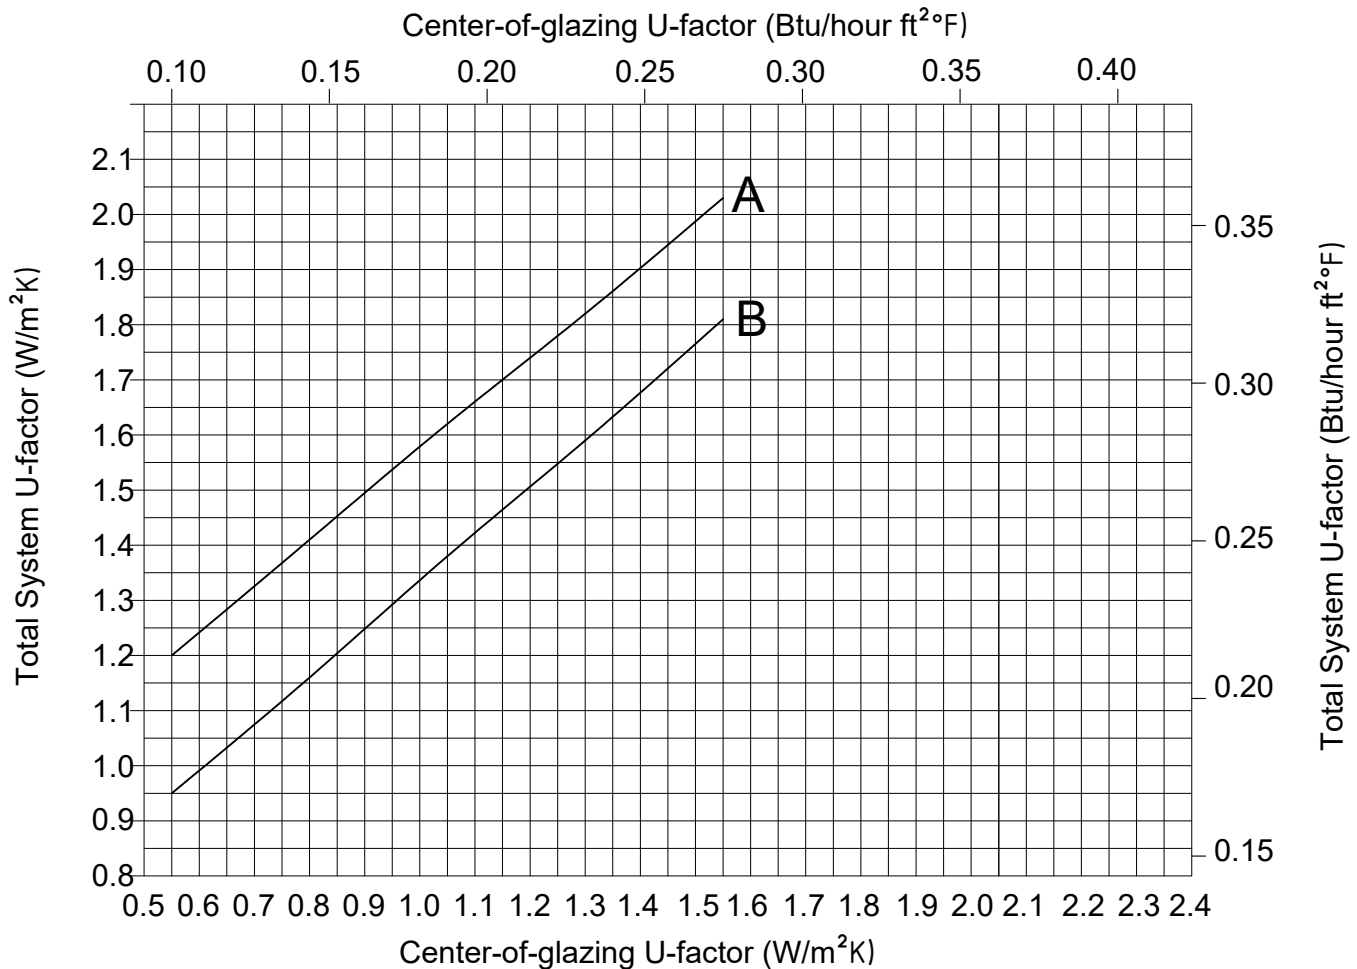

ENVIRONMENTAL CONDITIONS: NFRC 100-2001		
Inside Air Temperature	Outside Air Temperature	Outside Wind Speed
21° C	-18° C	5.5 m/s

**POUR LA VERSION EN FRANÇAIS, VEUILLEZ VOIR LA PAGE : 1.3.2.6**