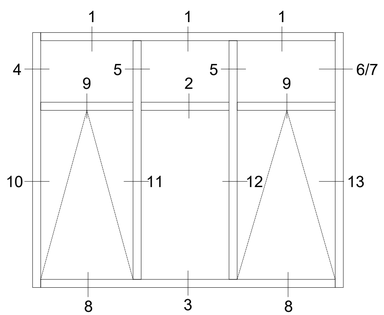

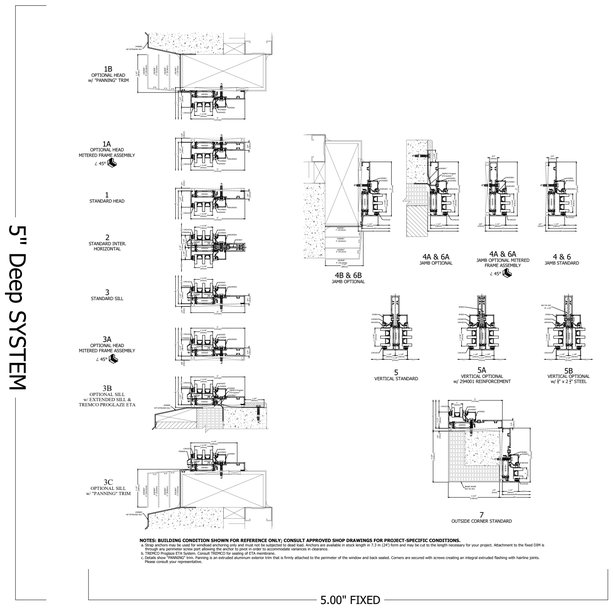

NOTES: BUILDING CONDITION SHOWN FOR REFERENCE ONLY; CONSULT APPROVED SHOP DRAWINGS FOR PROJECT-SPECIFIC CONDITIONS.

a. Strap anchors may be used for windload anchoring only and must not be subjected to dead load. Anchors are available in stock length in 7.3 in (24") form and may be cut to the length necessary for your project. Attachment to the fixed DIM is through any perimeter screw pad allowing the anchor to pivot in order to accommodate variances in clearance.
b. TRESMCO Proglaze ETA System. Consult TRESMCO for catalog of ETA membrane.
c. Details show "PANNING" trim. Panning is an extruded aluminum exterior trim that is firmly attached to the perimeter of the window and back sealed. Corners are secured with screws creating an integral extruded flashing with hairline joints. Please consult your representative.

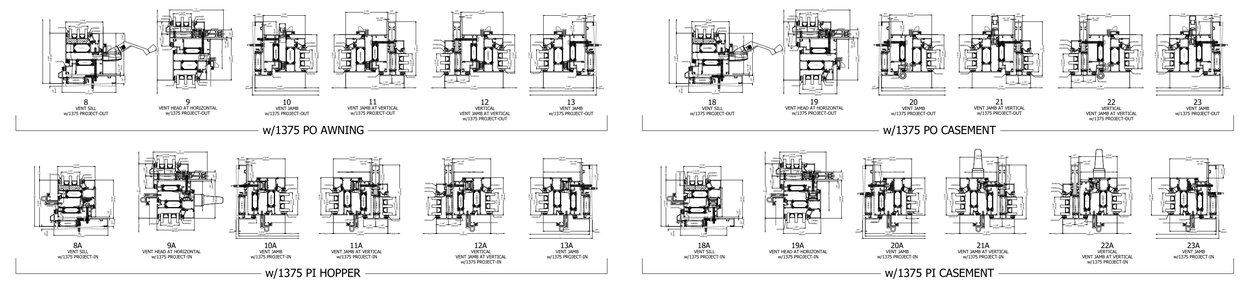

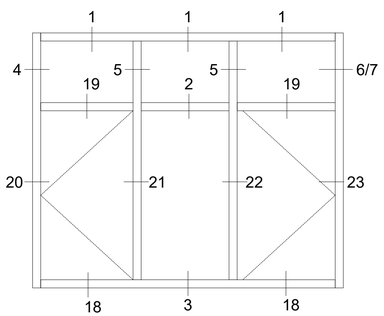

TYPICAL ELEVATION

2900AW TRUELINE W/ TRIPLE GLAZED

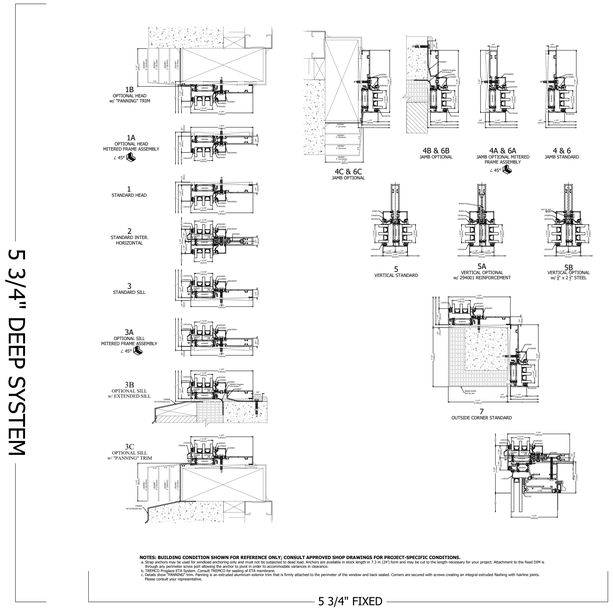

NOTES: BUILDING CONDITION SHOWN FOR REFERENCE ONLY; CONSULT APPROVED SHOP DRAWINGS FOR PROJECT-SPECIFIC CONDITIONS.

a. Strap anchors may be used for windload anchoring only and must not be subjected to dead load. Anchors are available in stock length in 7.3 in (24") form and may be cut to the length necessary for your project. Attachment to the fixed DIM is through any perimeter screw pad allowing the anchor to pivot in order to accommodate variances in clearance.
b. TRESMCO Proglaze ETA System. Consult TRESMCO for catalog of ETA membrane.
c. Details show "PANNING" trim. Panning is an extruded aluminum exterior trim that is firmly attached to the perimeter of the window and back sealed. Corners are secured with screws creating an integral extruded flashing with hairline joints. Please consult your representative.

POSSIBLE READ THROUGH CONDITION

Alumicor™ BUILDING EXCELLENCE

TUBELITE® DEPENDABLE

LAST REVISED: 11/20/2024