

CASEMENT PO INFORMATION (DOUBLE GLAZED)

WITH 4-BAR / CAMS

*MIN DIMENSIONS 16" x 16" [406 x 406]

*MAX DIMENSIONS 36" x 60" [914 x 1524]

SCREEN OPTIONAL with WICKET

MAX OPENING VARIES

LIMITED OPENING OPTION @ 4" [102]

CUSTODIAL HANDLE OPTION




EGRESS N/A


**Based on (DLO) dimensions, Dimensions in brackets are in [mm] millimeters*

Fixed Window Integration

Curtain Wall Integration

Storefront Integration

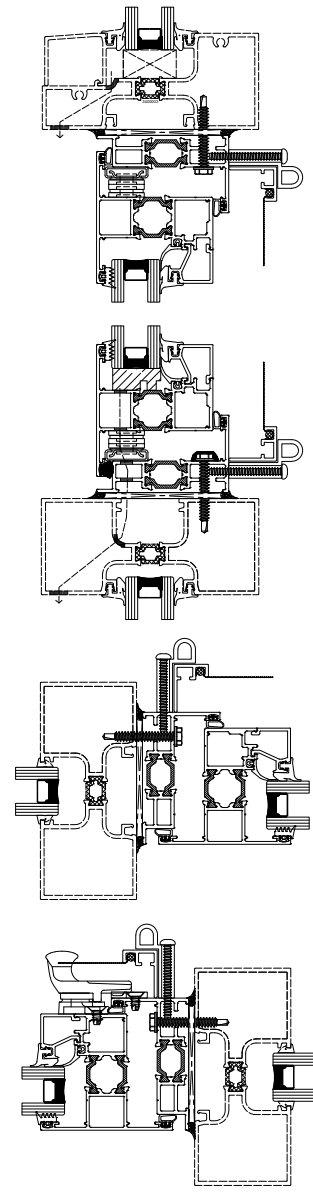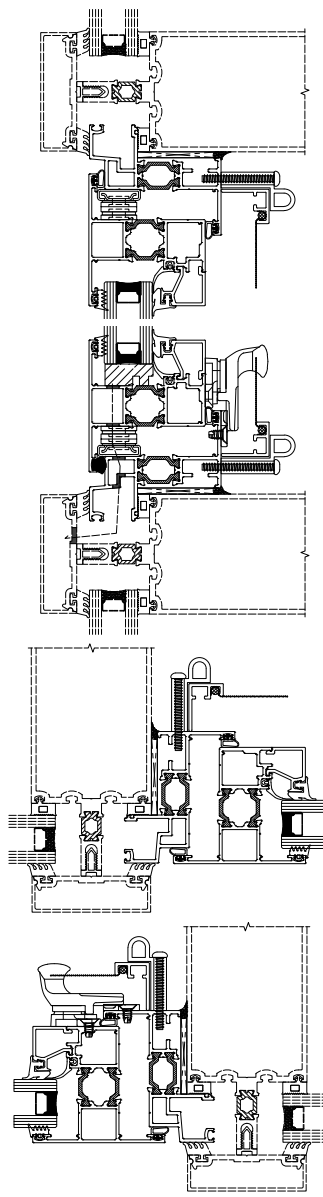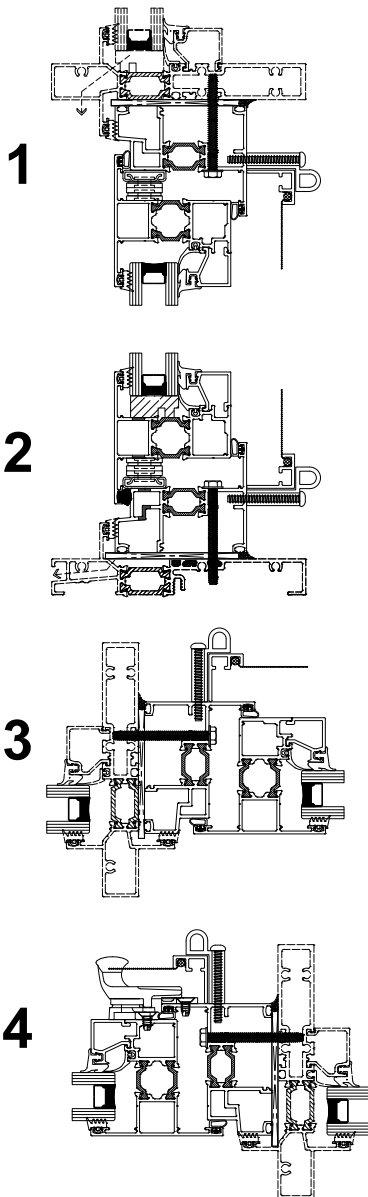



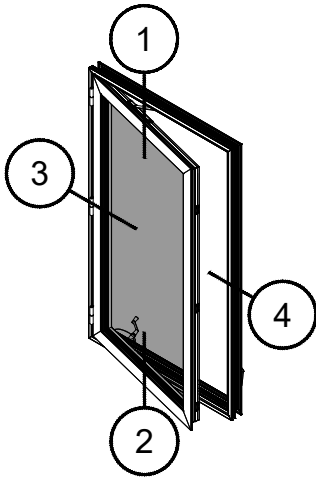


CASEMENT PO INFORMATION (DOUBLE GLAZED)
 WITH BUTT HINGE / ROTO-MULTI POINT HANDLE
 *MIN DIMENSIONS 16 5/8" x 21" [422 x 533]
 *MAX DIMENSIONS 36" x 62" [914 x 1575] or 27" x 84" [686 x 2134]
 SCREEN OPTION
 MAX OPENING VARIES
 LIMITED OPENING OPTION @ 4" [102]
 CUSTODIAL HANDLE OPTION
 EGRESS OPTION
 *Based on (DLO) dimensions, Dimensions in brackets are in [mm] millimeters



Fixed Window Integration

Curtain Wall Integration

Storefront Integration

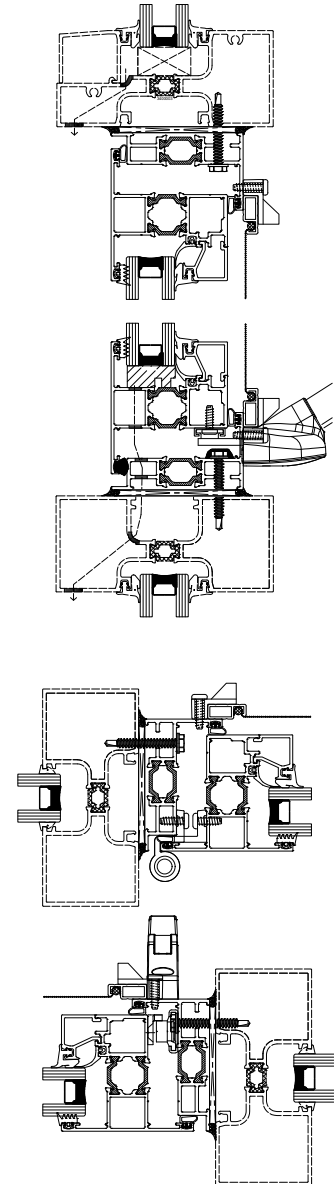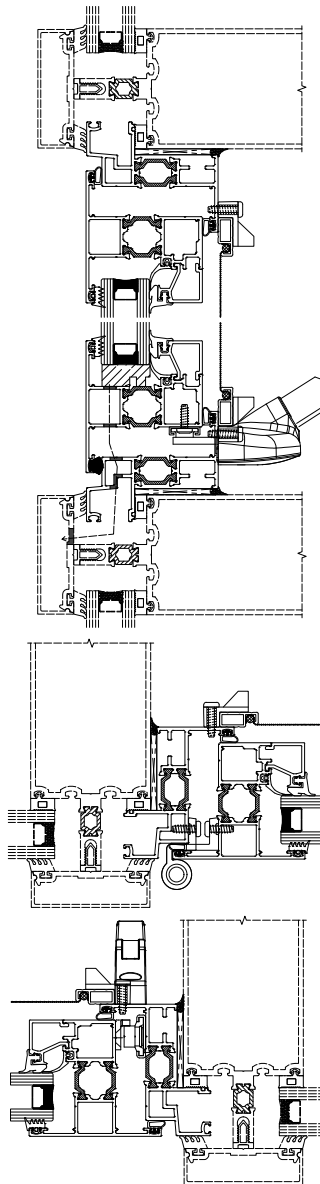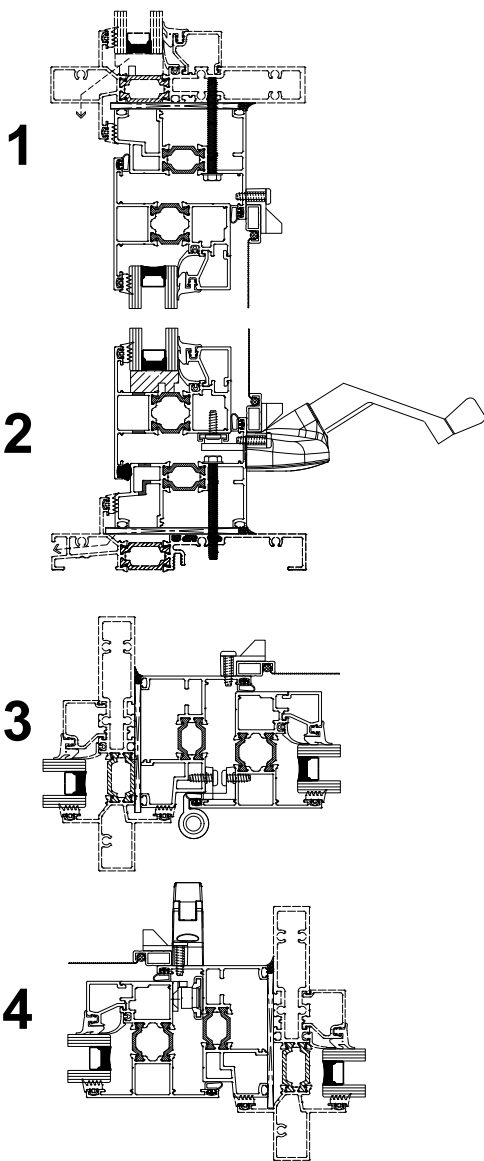

CASEMENT PROJECT OUT WITH ROTO OPERATOR & MULTIPOINT LOCKING OR CAM HANDLE (Double Glazed)

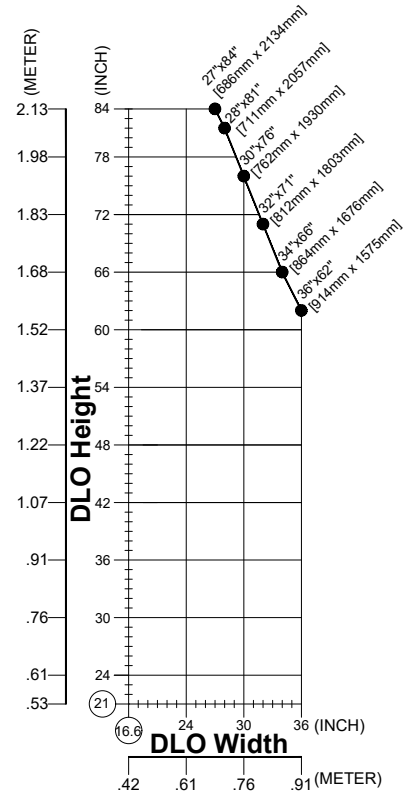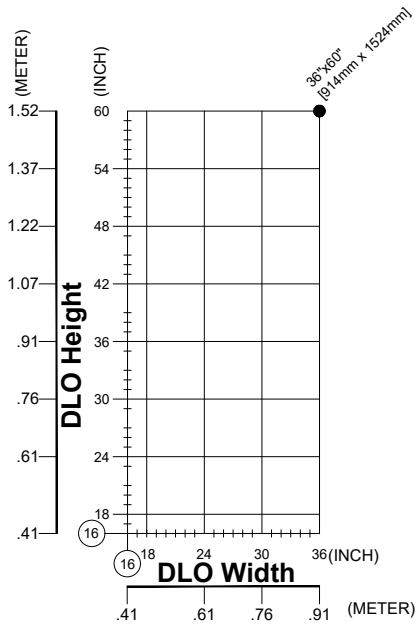

CAM HANDLE casement hardware includes the following:

- White Bronze handle finish
- One or two ring CAM handles (as required) located on the sash
- One pair stainless steel friction arms
- Snubber set (as required)
- Glass stop for 1" [25.4mm] glazing
- Interior glazing spline



CAM HANDLE




OPTIONAL CUSTODIAL CAM LOCK WITH REMOVABLE HANDLE

Optional extras (must be specified at time of ordering or quotation):

- Insect screen (fiberglass or aluminum mesh)
- Custodial lock with removable handle
- Sash limiters
- Hardware other than standard
- Glazing gasket for 1 1/16" [27mm] IGU

ROTO-MPL casement hardware includes the following:

- Silver, White or Black hardware finish
- One multipoint locking handle located on the lock side of the frame
- One ROTO Operator
- Two or three BUTT Hinges (as required)
- Glass stop for 1" [25.4mm] glazing Interior glazing spline

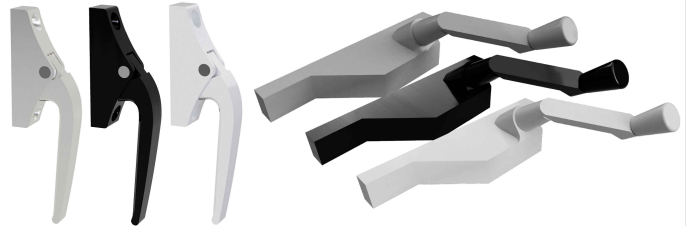

MPL HANDLE

ROTO OPERATOR



OPTIONAL CUSTODIAL LOCK WITH REMOVABLE HANDLE

Charts are based upon an insulating glass unit infill of 1" [25.4mm] overall thickness comprised of 6mm glass/13mm gas fill/6mm glass

Using this chart: Ensure your largest maximum size falls within the above size limitation chart